


**NOTE:**

GENERAL: ALL TRENCHING AND EXCAVATION SHALL COMPLY WITH MANITOBA'S WORKPLACE HEALTH AND SAFETY REGULATIONS

1. DEPTH OF VERTICAL CUT SHALL NOT EXCEED 1.0m
  2. GBC-I, GBC-II, GBC-M OR CULVERT GRAVEL
  3. GBC-I, GBC-II, GBC-M, GSB-C, GSB-F, CR-M50, CR-M100 OR CR-M125. FOR >2.5m CULVERT COVER, EITHER NATIVE OR GRANULAR FILL MAY BE USED.
  4. CR-M50 SHALL BE USED AS SUBBASE IF CR-M100 OR CR-M125 IS USED AS UNDERLYING GRANULAR FILL MATERIAL.
  5. FOR BITUMINOUS PAVEMENT, MINIMUM 100

ALL DIMENSIONS ARE IN MILLIMETRES, UNLESS SPECIFIED OTHERWISE

SEAL

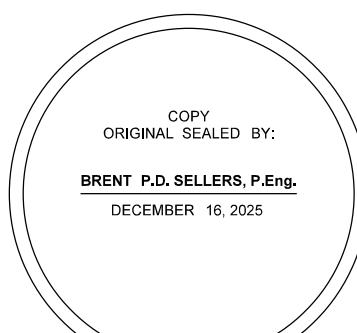

COPY  
ORIGINAL SEALED BY:  
BRENT P.D. SELLERS, P.Eng.  
DECEMBER 16, 2025